



## TECHNICAL DATA SHEET

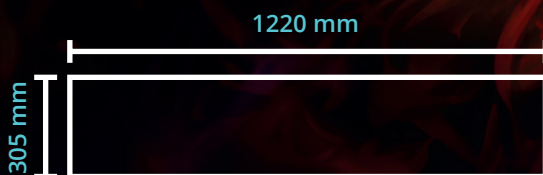

Total thickness

**6,0 mm**



Underlay thickness

**1,0 mm**



Wear layer

**0,50 mm**

PRODUCT SPECIFICATION	NORM	VALUE
Width	EN 17539	1220 mm
Length	EN 17539	305 mm
Total thickness	EN 17539	6 mm
Wear layer	EN 429	0,50 mm
Installation		UNICLIC
Edge		4V
Warranty - Residential use		20 year
Warranty - Commercial use		7 year
TECHNICAL VALUE		
Class of use residential	EN ISO 10874	Class 23
Class of use commercial	EN ISO 10874	Class 33
Reaction to fire	EN 13501-1 / EN 9239-1:2010	Bfl-s1
Slipperiness	EN 13893	DS
Thermal Resistance	EN 12667	0,0311 m <sup>2</sup> K/W
Thermal Conductivity	EN 12667	0,296 W/(m*K)
Light fastness	EN ISO 105-B02:2014	Class ≥6
Resistance against staining	EN 438-2+A1	0 – not affected
Dimensional stability	EN ISO 23999	≤ 0,05%
Dimensional stability and curling after exposure to heat	EN ISO 23999	0 mm
Residual indentation	EN ISO 24343-1	0,01 mm
Castor chair resistance	EN ISO 4918	not affected
Electrostatic Behaviour	EN 1815:2016	Antistatic ≤ 0,11 kV
Acoustic insulation	ISO 10140-1:2021 Annex H ISO 717-2:2020	ΔLw = 19dB
Floor heating	<b>Appropriate for all standard heating systems in cement subfloors. Limited application with heating films and alternatives. Max contact temp ≤ 27°C</b>	

## ENVIRONMENTAL ASPECT

Formaldehyde emission	EN 717-1	E1
AFFSET		A+
Floorscore		SCS-FS-09066
TVOC emission within 28 days	ISO 22196	pass

## LOGISTIC DATA

	quantity pcs.	quantity m <sup>2</sup>	weight
Packaging unit	5 pcs.	1,861 m <sup>2</sup>	16,29 kg ±5%
Pallet	48 pkg.	89,30 m <sup>2</sup>	929,84 kg ±5%

## STRUCTURE

- 1 UV Coating
- 2 Wear layer
- 3 Decor film
- 4 Rigid core
- 5 Cushion pad

